

## Floor System

- 1 **Sills:** 2 x 6 PTSYP (graded #1 Pressure Treated Southern Yellow Pine)
- 2 **Girders:** Typically 2 x 10 or LVL (Laminated Veneer Lumber) built up on job
- 3 **Double Headers:** 2 x 8 or 2 x 10 spruce
- 4 **Floor Joists:** 2 x 10 spruce 16" O.C.
- 5 **Subfloor:** 3/4" T&G (Tongue and Groove) AdvanTech®
- 6 **Porch and Deck Floor Framing:** Floor joists, sills and headers—2 x 6, 2 x 8 or 2 x 10 PTSYP
- 7 **Porch and Deck Flooring:** 5/4 x 6 radius edge Premium Grade PTSYP
- 8 **Log Siding:** 2 courses to cover floor framing headers
- 9 **Hardware:** Floor joist hangers; metal cross bridging

## Walls and Gables

- 10 **Wall and Gable Logs:** Eastern White Pine, Premier Grade, milled 6 x 8 "D" shaped tongue and groove, Pre-Cut and numbered logs, Kiln Dried
  - **Log Sealants:** Log caulking; foam gaskets; pre-compressed corner pads; 11" LogHog Screws
  - **Window and Door Jambs:** Specially-milled 4 x 4 pine with screws
- 11 **Log Siding Corner Projections:** (projections not shown), provided at floor frame skirting, Eastern White Pine, Kiln Dried
  - **Wall Braces:** 6 x 6, 6 x 8, 6 x 10, or 6 x 12 pine or spruce as required with hardware

## Interior Partitions


- 12 **Interior Partition Framing:** 2 x 4 or 2 x 6 shoe, double plate, studs, blocking, headers, and fillers as required per plan
- 13 **Pilaster Studs:** with hardware
- 14 **Interior Partition Sheathing:** 1" knotty pine v-match for sheathing first and second floor partitions on both sides
  - **Posts & Beams & Wall Braces:** Pine, Spruce or LVL as required with hardware

## Ceilings

- 15 **Ceiling Joists:** Graded 4 x 8 spruce beam ceiling joists, hangers supplied when required. Note—1" knotty pine v-match boards supplied for ceiling when not used for loft floor
- 16 **2" V-Match Flooring** for all loft areas—loft flooring & ceiling sheathing applied on top of 4 x 8 beams

## Roof Systems

- 17 **Pre-Cut Beam Trusses:** 6 x 6 and 6 x 8 spruce, as needed, pre-drilled and complete with gusset plates and fasteners†
- 18 **Roof Purlins:** Graded 4 x 8 spruce, pre-cut
  - **Pre-Built Truss Rafters:** Note: We do not supply temporary or permanent bracing
- 19 **4 x 6 Ledgers:** with hardware
- 20 **4 x 8 Blocking:** with fasteners
- 21 **First Roof Boards:** 1" knotty pine v-match
  - **Soffits:** from 1" knotty pine v-match boards
- 22 **Ridge Nailers**
- 23 **Gable Insulation Stops**
- 24 **Fly Rafter Materials:** per plan
- 25 **Ladder Rafter Materials:** per plan
- 26 **Roof Strapping:** 2 x 3 spruce 24" O.C.
  - **Roof Strapping Screws**
- 27 **Exterior Roof Sheathing:** 5/8" T&G AdvanTech®
- 28 **Fascia:** 1" pine boards
- 29 **Felt Paper:** NOTE—By Others #

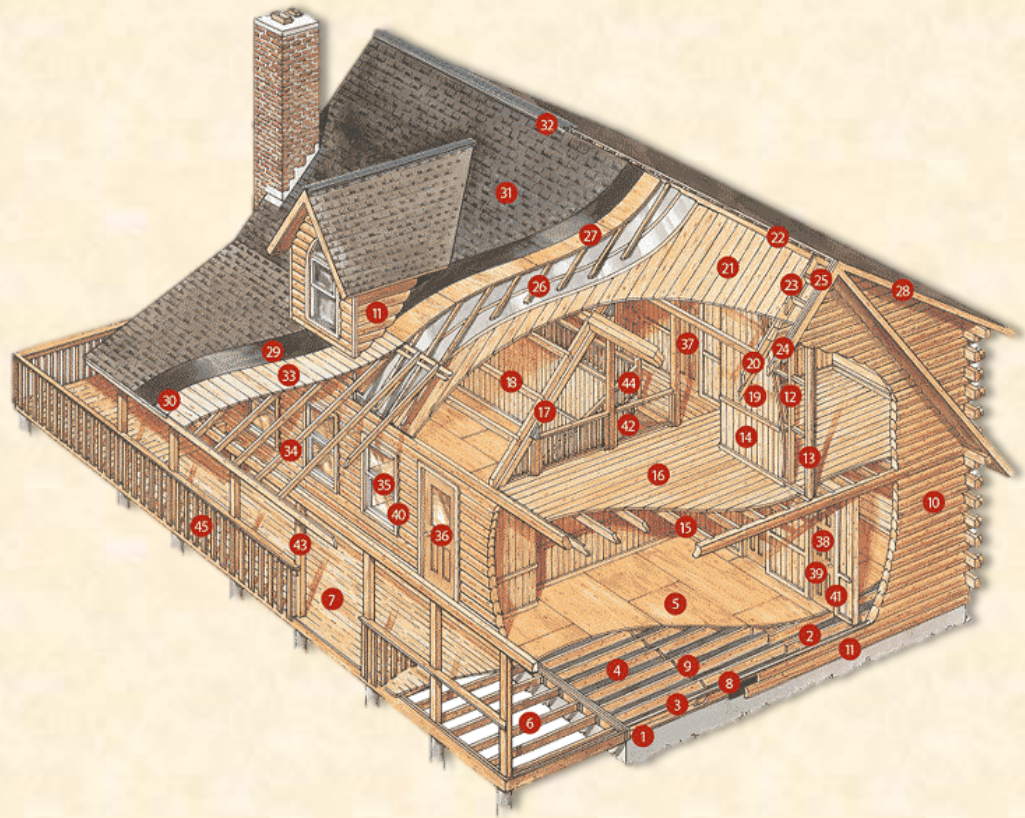

- 30 **Drip Edge:** NOTE—By Others #
- 31 **Shingles or Metal Roof:** NOTE—By Others #
- 32 **Vents:** Ridge and soffit
- 33 **Shed Roof Porches:** Made up of 1 knotty pine v-match boards and T&G AdvanTech®
  - **Porch Roof Sheathing:** 5/8" T&G AdvanTech
- 34 **Porch Rafters:** 4 x 8 spruce for shed roof porches as required
  - † NOTE: Some models have pre-built truss rafters and 5/8" T&G AdvanTech® roof sheathing. We do not supply temporary or permanent bracing.
  - # NOTE: Indicates Material By Others

## Windows and Doors

- 35 **Andersen® 400 Series:** Low-E4™ glass Tilt-Wash Double-Hung and Casement windows with full screens  
COLORS: Sandtone, Terratone®, Forest Green, and White. NOTE: Dark Bronze and Black available at an upcharge
  - **Andersen® 400 Series Frenchwood® Hinged and Gliding Patio Doors:** Low-E4™ glass, with screens, hardware and locksets  
COLORS: Sandtone, Terratone®, Forest Green, and White.  
NOTE: Dark Bronze and Black available at an upcharge
- 36 **Exterior Doors:** Thermo-Tru® Classic-Craft® fiberglass door system, pre-hung and weatherstripped with Low-E tempered glass
- 37 **Interior Doors:** 6-panel in solid pine per plan
- 38 **Closet Doors:** 6 panel in solid pine per plan
- 39 **Locksets:** For all interior and exterior hinged doors; hardware for all sliding closet and pocket doors  
COLORS: Bright Brass, Antique Brass, Oil Rubbed Bronze
- 40 **Exterior Window and Door Trim:** Random length pine specially milled 2 x 4 radius edges
- 41 **Interior Window and Door Trim:** NOTE—By Others #

- **Roof Windows:** Velux VS Series with screens; pole with adapter as required

## Miscellaneous Materials Supplied Per Plan

- **Basement Stairs:** 2 x 12 stringers and treads with 1" pine risers and guard railing
- 42 **Loft Stairs:** 2 x 12 stringers, SYP (Southern Yellow Pine) treads with 1" pine risers and guard railings as necessary
- 43 **Porch Posts:** 6 x 6 spruce or pine
  - **Exterior Framed Walls:** Partition frame, 7/16" OSB, log siding
- 44 **Interior Railings:** 4 x 4 posts, 2 x 4 rails, vertical slats
- 45 **Exterior Railings:** 2 x 2, 2 x 4 and 5/4 x 6 premium grade PTSYP supplied for porches, decks and exterior balconies
  - **House Sill Tie Downs:** from banding
  - **Splined Post:** Specially milled 4 x 6 and 6 x 6 as required
  - **Construction Documents:** 2 Sets
  - **Construction Guide**
  - **Andersen Window Products:** Optional HeatLock glazing
  - **Log Siding Corner Projections:** Optional for exterior stick-built walls
  - **Garage Material List:** Shown on Traditional Series Material List
- **NOTE:** Always refer to your individual price quote & Signed Order Form for the specific material supplied with your home design. Dimensional material may vary in size depending on engineering and design requirements.

† NOTE: Indicates some models have pre-built truss rafters and 5/8" square edge AdvanTech® roof sheathing. We do not supply temporary or permanent bracing.

# NOTE: Indicates Material BY OTHERS—Listed for informational purposes only

• NOTE: Indicates material provided, but not shown on cutaway illustration