




2022 Premier Series Log Home Materials List



Floor System

- 1 Sills:** 2 x 6 PTSYP (graded #1 Pressure Treated Southern Yellow Pine)
- 2 Girders:** Typically 2 x 10 or LVL (Laminated Veneer Lumber) built up on job
- 3 Double Headers:** 2 x 8 or 2 x 10 spruce
- 4 Floor Joists:** 2 x 10 spruce 16" O.C.
- 5 Subfloor:** ¾" T&G (Tongue and Groove) AdvanTech®
- 6 Porch and Deck Floor Framing:** Floor joists, sills and headers— 2 x 6, 2 x 8 or 2 x 10 PTSYP
- 7 Porch and Deck Flooring:** 5/4" Radius Edge Premium Grade PTSYP
- 8 Log Siding:** 2 courses to cover floor framing headers
- 9 Hardware:** Floor joist hangers; metal cross bridging

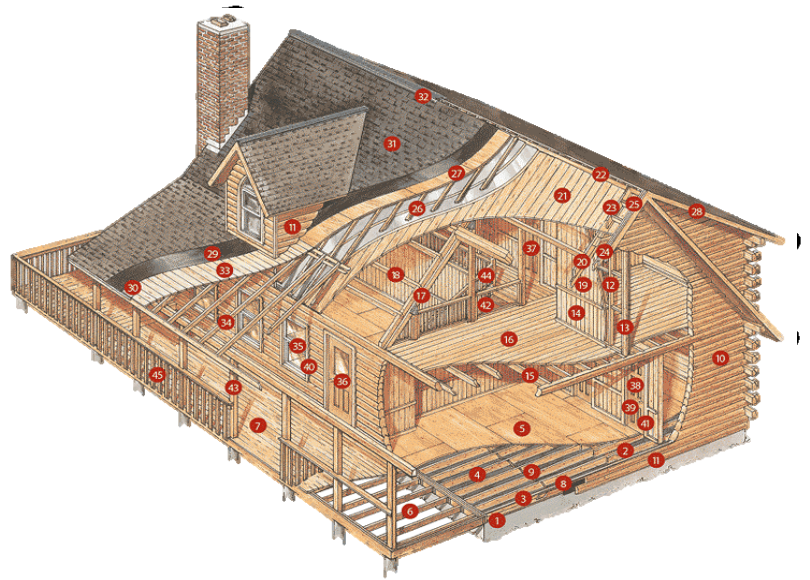

Walls and Gables

- 10 Wall and Gable Logs:** Eastern White Pine, Premier Grade, milled 6 x 8 "D" shaped tongue and groove, Pre-Cut and numbered logs, Kiln Dried
 - **Log Sealants:** Log caulking; foam gaskets; pre-compressed corner pads; 11" LogHog Screws
 - **Window and Door Jambs:** Specially-milled 4 x 4 pine with screws
- 11 Log Siding Corner Projections:** (projections not shown), provided at door frame skirting, Eastern White Pine, Kiln Dried
 - **Wall Braces:** 6 x 6, 6 x 8, 6 x 10, or 6 x 12 pine or spruce as required with hardware

Interior Partitions

- 12 Interior Partition Framing:** 2 x 4 or 2 x 6 shoe, double plate, studs, blocking, headers, and fillers as required per plan
- 13 Pilaster Studs:** with hardware
- 14 Interior Partition Sheathing:** 1" knotty pine v-match for sheathing first and second floor partitions on both sides
 - **Posts & Beams & Wall Braces:** Pine, Spruce or LVL as required with hardware

Ceilings


- 15 Ceiling Joists:** Graded 4 x 8 spruce beam ceiling joists, hangers supplied when required. **Note:** 1" knotty pine v-match boards supplied for ceiling when not used for loft floor
- 16 2" V-Match Flooring** for all loft areas-loft flooring & ceiling sheathing applied on top of 4 x 8 beams

Roof Systems

- 17 Pre-Cut Beam Trusses:** 6 x 6 and 6 x 8 spruce, as needed, pre-drilled and complete with gusset plates and fasteners†
- 18 Roof Purlins:** Graded 4 x 8 spruce, pre-cut
 - **Pre-Built Truss Rafters:** Note: We do not supply temporary or permanent bracing†
- 19 4 x 6 Ledgers:** with hardware
- 20 4 x 8 Blocking:** with fasteners
- 21 First Roof Boards:** 1" knotty pine v-match
 - **Soffits:** from 1" knotty pine v-match boards
- 22 Ridge Nailers**
- 23 Gable Insulation Stops**
- 24 Fly Rafter Materials:** per plan
- 25 Ladder Rafter Materials:** per plan
- 26 Roof Strapping:** 2 x 3 spruce 24" O.C.
 - **Roof Strapping Screws**
- 27 Exterior Roof Sheathing:** 5/8" AdvanTech®
- 28 Fascia:** 1" pine boards
- 29 Felt Paper:** NOTE--By Others #
- 30 Drip Edge:** NOTE--By Others #
- 31 Shingles or Metal Roof:** NOTE--By Others #
- 32 Vents:** Ridge and soffit*
- 33 Shed Roof Porches:** Made up of 1 knotty pine v-match boards and T&G AdvanTech®
 - **Porch Roof Sheathing:** 5/8" AdvanTech
- 34 Porch Rafters:** 4 x 8 spruce for shed roof porches as required



2022 Premier Series Log Home Materials List

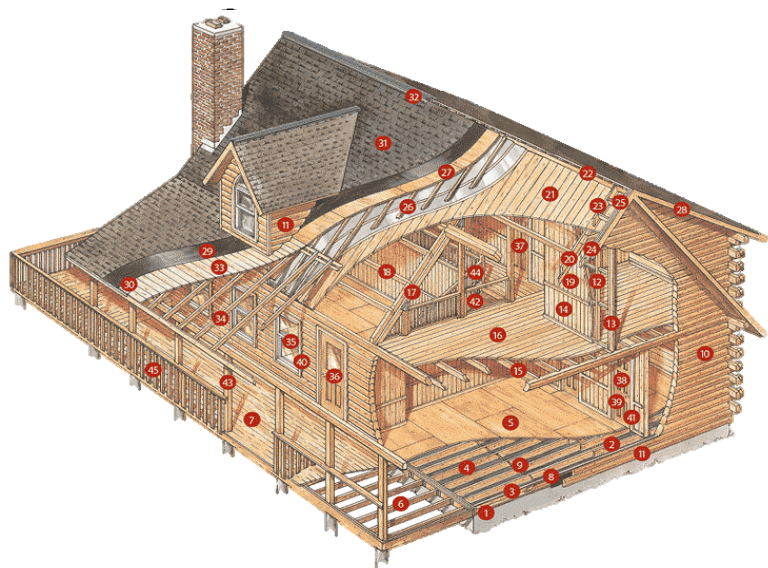

Windows and Doors

35 Andersen® 400 Series: Low-E4™ glass Tilt-Wash Double-Hung and Casement windows with full screens
COLORS: Sandtone, Terratone®, Forest Green, Dark Bronze, Black, Canvas, and White.

- **Andersen® Hinged and Gliding Patio Doors:** Low-E4™ glass, with screens, hardware and locksets
COLORS: Sandtone, Terratone®, Forest Green, Dark Bronze, Black, Canvas, and White.

36 Exterior Doors: Therma-Tru® Classic-Craft® fiberglass door system, pre-hung and weatherstripped with Low-E tempered glass

37 Interior Doors: 6-panel in solid pine per plan

38 Closet Doors: 6 panel in solid pine per plan

39 Locksets: For all interior and exterior hinged doors; hardware for all sliding closet and pocket doors

COLORS: Bright Brass, Antique Brass, Oil Rubbed Bronze

40 Exterior Window and Door Trim: Random length pine specially milled 2 x 4 radius edges

41 Interior Window and Door Trim: NOTE—By Others #

- **Roof Windows:** Velux VS Series with screens; pole with adapter as required

Miscellaneous Materials Supplied Per Plan

- **Basement Stairs:** 2 x 12 stringers and treads with 1" pine risers and guard railing

42 Loft Stairs: 2 x 12 stringers, SYP (Southern Yellow Pine) treads with 1" pine risers and guard railings as necessary

43 Porch Posts: 6 x 6 spruce or pine

- **Exterior Framed Walls:** Partition frame, 7/16" OSB, log siding

44 Interior Railings: 4 x 4 posts, 2 x 4 rails, vertical slats

45 Exterior Railings: 2 x 2, 2 x 4 and 5/4 premium grade PTSYP supplied for porches, decks and exterior balconies

- **House Sill Tie Downs:** from banding

- **Splined Post:** Specially milled 4 x 6 and 6 x 6 as required

- **Construction Documents:** 2 Sets

- **Construction Guide**

- **Andersen Window Products:** Optional HeatLock glazing

- **Log Siding Corner Projections:** Optional for exterior stick-built walls

Garage Material List shown on Traditional Series Material List

NOTE—Always refer to your individual price quote and Signed Order Form for specific material supplied with your home design.

† Indicates some models have pre-built truss rafters and 5/8" Advantech roof sheathing. We do not supply temporary or permanent bracing

Indicates Material BY OTHERS

- Indicates material provided but not shown on illustration